

FUSION

Smart Sound & Vibration
Analyzer

Technology At The Service Of Your
Productivity



FUSION - Technology At The Service Of Your Productivity

Simply Unique!

With FUSION, Acoem launches its new sound level meter: simply unique, designed to fulfil your needs in all situations. Easy to use, as effective in the hand as on a tripod, this instrument offers the best available technology to handle all measurement situations.

Powerful functions, including vibration measurements, are integrated to meet your needs for on-site analysis, making FUSION the most innovative sound level meter and an exceptionally communicating tool, increasing your productivity!

Certified Class 1 solution according to IEC 61672, FUSION offers the highest standard in metrological quality for your data. Multitasking it gathers performance and simplicity within one single instrument. Connection to an intelligent wireless sensor FUSION can even record vibrations signals on 3 axes simultaneously with acoustic indicators and audio signals.

FUSION is a new member within Acoem ecosystem focused on improving your productivity. You will appreciate its simplicity of use, its degree of remote controllability and the power of its processing software.

Main Applications

FUSION is a multi-purpose sound level meter including all functions aimed at maximizing your productivity. It can be used as a control instrument and offers evaluation, analysis and monitoring capabilities application to noise and vibration measurement in the following fields of activity:

- Noise exposure
- Industrial plant noise mapping
- Urban noise
- Construction site noise
- Industrial noise
- Transportation noise
- Windmill noise
- Recreational activities noise
- Vibration of machines
- Vibration of structures
- Building acoustic

Main Specifications

FUSION presents the unique technical specifications:

- IEC 61672 Class 1
- Built-in preamplifier
- IEC 61672 Class 1
- Built-in preamplifier
- Free-field microphone type G.R.A.S.40CE
- Large dynamic range 118 dB
- Self-check system (CIC)
- Automatic calibrator detection
- High-definition color display
- Rubber side grips
- Windscreen claw
- All-in-one: Wi-Fi, 3G Modem, GPS...
- Remote control by web interface
- Parallel storage of all acoustic indicators
- Advanced triggers
- HTTP commands for integrators
- Push Data Mode
- Metrological and MP3 audio recording
- Wireless vibration signal recording in 3 axis (option)
- 24-hour capacity
- Building Acoustics Module (option)
- Multiple processing software packages (dBTrait, dBFa, dBInside...)
- Compatible with O1dB WebMonitoring services
- Numerous accessories (all weather case DSC01, outdoor unit DMK01...)

Performance And Simplicity

The Acoem Ecosystem

FUSION is a member the new 01dB product range sharing with DUO and CUBE the same ecosystem focused on improving your productivity. Being familiar with one of them just means mastering the other ones. Same built-in screen, same web interface, same accessories, same software tools... everything is designed in order to optimize the time you need to use these instruments.



Simplified Ergonomics

FUSION can be used with its context keys and high-definition built-in colour screen. It is therefore possible to load a stored configuration, to start an acquisition, to mark an event and start an audio recording, to do a calibration and to access stored measurements ...

No more need for a computer keyboard to manage the whole set of measurement campaigns!



Remote Communication

Using a communicating tool (smartphone, tablet, laptop...) you can access FUSION using a simple internet browser. Thanks to the embedded webserver FUSION offers direct access to any of the available functions: configuration, coding, acoustic calibration and electrical check, real time display of instant values... without the need of further specific applications.

Remote connection is possible using Ethernet, Wi-Fi or 3G integrated modem (option). Therefore remote access to FUSION is possible from wherever you are.



Optimized Power Consumption

Programmable stand-by mode allows for optimizing FUSION's power consumption when there is no mains power available on site. The operator can select date and time for stand-by and wake-up in web interface. He can also force a manual wake-up by sending an SMS or by pressing the power on button.

Moreover FUSION can send an SMS when the battery capacity becomes inferior to 10%.

When the battery capacity becomes less than 3%, FUSION automatically stops the acquisition, stores the data in the SD card and enters stand-by mode. As soon as the power supply is connected again, FUSION wakes up and retrieves the previous measurement mode.

GPS Location

The built-in GPS allows FUSION to get measurement data include GPS location for easy visualization of the measurement position in dBTRAIT post-processing software.

In case of an unexpected displacement of FUSION, a user defined movement detection function will warn the operator by sending an SMS with the new geographical coordinates and the distance from the previous location (Need 3G Option).

ADVANCED ANALYSIS BASED ON SYNCHRONIZED LEVELS DIFFERENCE

Using several FUSION instruments synchronized on a single site allows for a detailed analysis of the recorded phenomena. It becomes possible to clearly identify a car and/or train pass-by, a building site noise, an industrial noise, using multiple coding. Analysis at the measurement point takes advantage of the information collected at the coding points (and thus validates that the incriminated sources are indeed active). Moreover, data post-processing using dBTrait allows assigning markers from the coding points onto the measurement campaign collected at the measurement point.



Smart And Powerful

FUSION measures noise and vibrations perfectly. Its powerful functions contribute to optimizing your operational efficiency: continuous audio recording, innovative trigger threshold definition, smart source recognition (building acoustics) advanced acoustic indicators, automatic calibrator detection, periodic electrical checks, remote setting changes, etc.

Wireless In Your Office

Direct access to FUSION is possible from your office Wi-Fi network without additional software. Any of your collaborators can thus have hands on one or several FUSION instruments using Wi-Fi access.

Measured data are collected at a glance and you can already schedule your next measurement campaign!

Accessories: More Than A Detail!

Lateral grips make FUSION fit well within your hand. In addition a neoprene hand strap which can be mounted using the dedicated aluminium profile on the back of the instrument is adding even more security for a perfect handling of your instrument.

A fixation profile for tripod mounting is also part of the delivered set of accessories. The FUSION can be quickly and securely mounted on a tripod.


A windscreen claw also comes along with FUSION, which prevent losing the windscreen when performing measurements.

Those accessories are genuinely useful thanks to users feedback and serve to improve your productivity day after day.



Acoem Software: So Powerful

To cover each application, Acoem offers a complete range of software tools: dBTrait (processing of data such as LAeq...), dBFa (advanced frequency analysis of measured data) or dBInside (processing of building acoustics measurements). dBTrait is the most commonly used software program with the entire range of Acoem products. Initiated in the early 90's dBTrait was progressively improved over the years, taking also benefits from users feedback. It includes processing functions such as multiple indicators calculations, analysis results according to regulations as well as advanced coding capabilities which help identify noise sources.

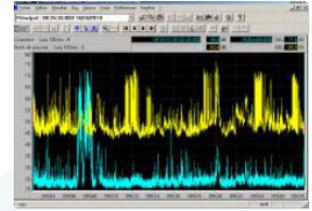

dBInside has a new interface designed to enhance acoustics consultants' efficiency and productivity. The purpose is to reduce the time spent on:


- data entry related to the measurements (measurement location and details, etc.),
- calculation of standardized indicators (unique indices)
- generation of measurement reports.

To simplify your work, you can install O1dB software as many times as needed. Furthermore, there is no physical protection key to plug into your PC.

General Overview



- 01 - Class 1 microphone
- 02 - Integrated preamplifier
- 03 - Colour display
- 04 - Keyboard
- 05 - Windscreen
- 06 - Removable hand grip
- 07 - Rail fastening
- 08 - Mini HDMI
- 09 - DC 8-28V power supply input
- 10 - RJ45 Network
- 11 - External microphone preamplifier input and analogue output
- 12 - Mini USB
- 13 - SIM card slot
- 14 - RS232 input
- 15 - TTL input/output
- 16 - SD card slot

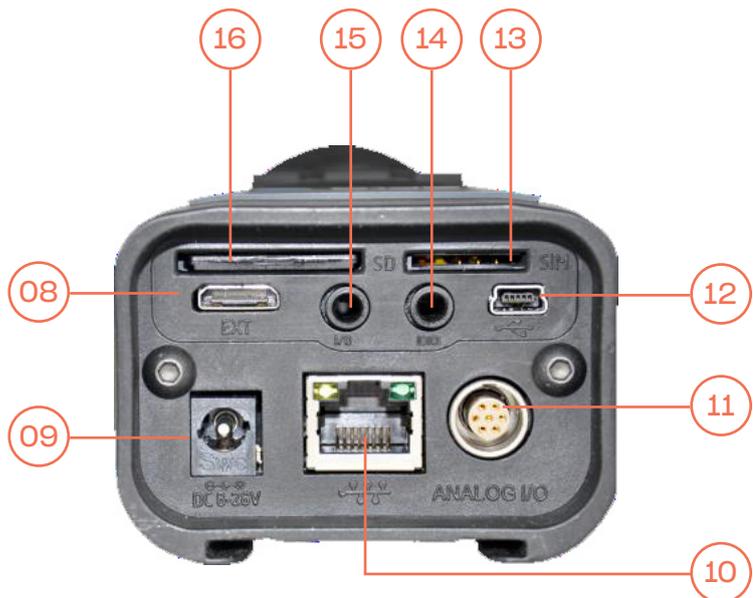

No Compromise With Metrology

Acoustic Calibration Detection

In order to simplify the deployment of FUSION in the field, an automatic function for the detection of a sound level calibrator is used to launch the calibration procedure without any action required from the user, other than powering up the calibrator.

When FUSION detects a stable level around the predefined calibration level, it automatically starts the calibration procedure. At the end of this procedure, the instrument indicates the new calculated sensitivity and prompts the user for validation, repeat or rejection of the calibration. Information provided is stored and added up to the historical data of the instrument.



Multi-Frequencies Charge Injection Check (CIC)

The built-in charge injection check allows testing the entire measurement chain, including the microphone of FUSION. It consists in injecting a sinusoidal charge (1 or 2 levels) into the microphone membrane, at the selected frequencies.



The principle is to collect reference levels (initialisation stage) and to check over time that the maximum deviation between the reference values and the measured values does not exceed a user defined level, typically set to 0.5 dB.


The controlled frequencies are 1000, 2000, 4000 Hz and a two user-defined frequencies. A multiple-frequency check offers the advantage of a better assessment of a possible degradation of the microphone membrane. The process lasts from 10 to 30 seconds and occurs between two measurement campaigns, so as to make their validation easy

0° Reference direction

During a measurement with the instrument in hand, the sound level meter must be pointed at the source according to standard IEC 60651. This is why FUSION can be configured for measurements with an angle of incidence of 0° with respect to its main axis.

The IEC-61672 standard requires a perfect control of the frequency response polar diagram, in particular at $\pm 30^\circ$.

The fine shape of FUSION, along with its conical upper part, allows complying with this criterion, with or without a nose cone. Statutory aircraft noise measurements also require the 0° incidence configuration.




90° Reference directions

During unattended monitoring measurement, multiple sources are usually measured with a random position with respect to the measurement point. Noise generated by ground transportation, leisure activities, construction sites is coming from all directions, although mainly the horizontal direction.

Placed vertically and configured for a propagation direction oriented 90° from its axis FUSION perfectly meets the requirements of the IEC 61672 standard on sound level meters relative to noise incidence from the horizontal direction.

The main technical difficulty is the criterion for the maximum level difference allowed between two random incidence angles. Close collaboration with

our Danish partner G.R.A.S. resulted in a cone-shaped device that fulfils this criterion, in particular at $\pm 30^\circ$.

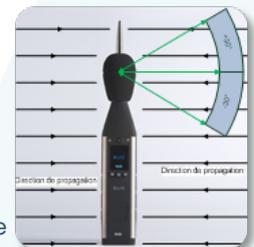

Three Measurement Modes

SLM Mode (Integrating Sound Level Meter)

The integrating sound level meter mode allows for a simple but complete noise assessment over a period that includes overall global and spectral data as well as statistics. In case of an unexpected event (dog barking, police or ambulance siren) during a measurement a back erase function will reject the last 5 or 10 seconds of measurement



LOG Mode (Integrating Logging Sound Level Meter)

FUSION in LOG mode includes the storage of time histories. It is designed for experts familiar with the short term Leq method. Instantaneous values and spectra are stored at every logging period T.


When the trigger option is active, up to 5 different markers can be entered manually. In addition an event detector can be defined with limits based on 24 possible consecutive periods of the day. FUSION can record a (non-compressed) metrological audio signal simultaneously with the events. When an event occurs, a fast logging period set by the user becomes active. Finally, during acquisition, written time-stamped comments can be recorded in the measurement campaign



Building Acoustic Mode (Option)

In this mode, FUSION enables all acoustics technicians to respond to all building acoustics measurement requirements:

- L1 Source level
- L2 Receive level
- Li Impact noise level
- Lb Background noise
- T Reverberation time with interrupted source
- T Reverberation time with impulsive source.
- Le Equipment noise level



This FUSION module has an unrivalled feature set:

- Smart organization of measurements for effective post-processing
- Reuse of previous measurement data
- Automatic detection of the type of measurement performed
- Measurement quality indicators for reverberation time (ISO 3382 standard)
- Display of decay on the built-in display
- Storage of the time history and fast time history of all instantaneous and spectral parameters for each measurement
- Parallel recording of audio signal
- Three-button control keypad
- Remote control via a mobile device (smartphone, tablet, computer PC/MAC, etc.)
- Recording of audio comments
- Automatic distribution of measurements for each test
- Ratings calculated immediately in the field in the sound level meter, without user intervention
- Can be used with any sound source and tapping machine without requiring any control interface between the sound level meter and the source



The dBInside software completes this FUSION module with the following features:

- Ratings calculated immediately on data transfer, without user intervention
- On-the-fly calculation of ratings as changes are made
- Comparison with regulatory values
- One-click report covering all tests

Multi-Communication

Communication Modules

The integration of communication modules in FUSION allows communicating with the instrument using in 4 different ways:

- USB storage
- Ethernet network (RJ45)
- Point-to-point Wi-Fi network
- Infrastructure Wi-Fi network
- 3G communication using the built-in modem (Modem option needs to be active; SIM card and subscription are not included).



All connection parameters are accessible from the web interface.

Crossed triggers between instruments (with fusion, cube and orion)


It is now possible to cross the triggers between acoustic and acoustic or vibration for more relevance on the identification of sources. Although it is often desirable to be able to link noise and vibration events to different locations, the realization has so far been complex. It is now possible and simple to share triggers in real time between acoustic or vibration monitoring stations! When an event is detected by FUSION at one location, it sends a trigger to another location (acoustic or vibration) connected on the same network.

For example, if your noise monitoring terminal detects an event, it sends a trigger to the vibration monitoring terminal located inside the construction site for an advanced identification and correlation process.

Remote Data Transfer

Access to stored data and data transfer can be obtained in different ways using:

- FTP client as for instance Filezilla®
- dBFileManager software (included with FUSION) for manual downloads on demand
- USB mass storage (SD card access)
- SD card removed and an external memory card reader.



Structure Of Stored Data

The structure of the measurement files allows the user selecting the types and dates of the data to transfer. This flexibility is particularly interesting in case of 3G communication where the cost of data transfer usually depends on the quantity of data to upload.

It is thus possible to transfer first all instantaneous values stored at each logging period. Then, and after preliminary analysis, time slots and additional data (spectra, markers and events at fast IT, audio files, provided all relevant options are active) can be selected to complement the transferred measurement campaign.

The corresponding file format (*.cmg) is compatible with all O1dB software.

Details Of Web Interface


Statuts Bar



Always on display, the status bar can be used to rapidly check the operating of the main functions of FUSION: current acquisition mode, battery status, detection of an error (overload, electrical check), possible marker(s) in progress, activation of a timer or not, number of GPS satellites picked up, type of connection and 3G signal strength.

Measurement Configuration


A measurement configuration for FUSION can be set using ergonomic sub-menus. It is then possible to remotely configure the parameters to store, the automatic trigger thresholds, the logging period and delayed starts.

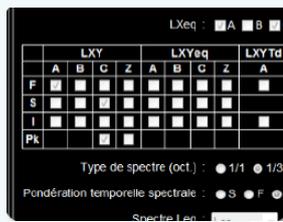

Configuration management allows rapidly loading a predefined configuration.

Data Access

Data stored in the instrument's memory can be viewed using the web interface: the user can visualise the different measurement campaigns stored in the instrument, without disturbing the measurement in progress. Additionally an automatic function can be activated in order to remove data older than a predefined number of days.

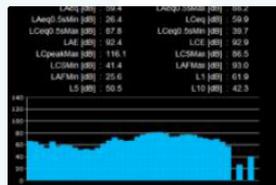


Powerful Data Acquisition

Innovative Acoustic Indicators

On top of usual instantaneous data measured and stored (Leq, spectra, ...), FUSION allows for acquiring advanced indicators at logging period rate on user defined periods:

- Sliding LAeq with user defined sliding period,
- Sliding Ln with user defined sliding period,
- Exposure level with predefined background noise,
- PNL and PNLt for aircraft noise certification.

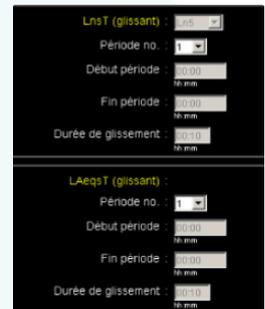

Unique Event Detection Filters

In order to efficiently detect noise events (upon noise threshold or noise source recognition conditions), FUSION has a unique system of filters.



All instantaneous data measured at logging period rate can be used as criteria for triggers, including advanced indicators, frequency bands and weather data.

Each trigger is defined by 7 different parameters (start/stop noise levels, pre-/post-trigger duration...). Furthermore, it can be typically setup on an hourly basis, which allows creating up to 24 different triggers in a day.

With the Advanced Trigger option, up to 5 triggers can be combined with logical operators ("AND"/"OR") to define an event. Up to 5 different events can be created, and then activated according user-selected days in a week (for instance: only Saturday and Sunday).

An event can generate several actions: personalised SMS, audio recording, parallel measurement with fast logging period, TTL output ...

Vibration But Differently

Innovation

Sometimes classical sound level meters can interface with vibration sensors more or less successfully. In any case this requires a wired solution, using one single measurement channel and... reading the collected results on a dB scale dedicated for acoustics!

As a world premiere O1dB proposes FUSION the only sound level meter capable of recording and storing in parallel 3-axis vibrations, audio signals and all acoustic indicators.



3-Axis Wireless Vibration

Relying on Wi-Fi connection FUSION interfaces with the wireless sensor WLS developed by ACOEM. This industrial sensor allows recording vibration signals on 3 axes (X, Y, and Z). The sensor's lifetime is 8 hours it can be recharged using a simple USB connection.

Acoustic And Vibration

FUSION allows recording vibrational signal on 1 (Z) or 3 axes simultaneously (X, Y and Z). What is more: FUSION can record and store in parallel 3-axis vibrations, audio signals and all acoustic indicators (instant values, spectral values...).

Audio and vibration signals recording is possible either manually using FUSION integrated keyboard, or remotely with a web interface connection to the instrument, or based on an acoustic trigger as part of the parameter definition of the current settings.

In fact it can be useful to further process vibration signals which correspond to a sound source with higher level than authorized.

Automatic Post-Processing

In order to optimize the analysis, the acquired signals (audio and vibration, recorded with a metrological quality) can be analyzed "on the spot" once imported within dBTRAIT. Predefined analysis can be set by the user and assigned in dBTRAIT. Of course such parameters can be modified at any time.


As soon as the automatic processing is performed, computed results corresponding to each signal become available within dBTRAIT for further processing and analysis.

Advanced Data Post-Processing (Logger Mode)

Markers Between Fusions

Using several FUSION instruments synchronized by GPS on a single site allows for a detailed analysis of the recorded phenomena. It then becomes possible to clearly identify a car and/or train pass-by, a building site noise, an industrial noise, using multiple markers.

Analysis at the measurement point takes advantage of the information collected at the coding points (and thus validates that the incriminated sources are indeed active). Moreover, data post-processing using dBTRAIT will allow assigning markers from the coding points onto the measurement campaign collected at the measurement point.

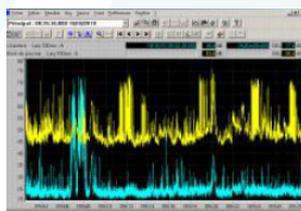


Synchronized Levels Difference Markers

Analysis in dBTRAIT allows first to calculate the time history of the difference between the measurement point and the coding point.

The time history of such difference is then analysed and automatically marked in order to detect events during which the disturbing source(s) emerge(s) from the sum of all other noises sources.

The example besides illustrates an analysis of the time difference between measurement and coding points. Results in blue (positive difference: noise levels at the measurement point higher than at the coding point) indicate some non-significant noise at the measurement point, whereas results in yellow show a negative difference which highlight some significant noise at the coding point.

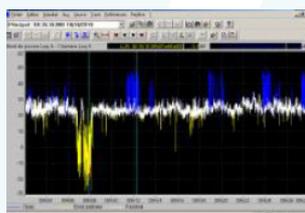

And Even More

Import And Export Of Configuration Files

Measurement configurations can be stored, exported and imported for the benefit of the user: it becomes therefore possible to load measurement configurations from a FUSION instrument onto several ones, and thus run measurement campaigns relying on the same parameter settings for all instruments. This feature is also of temporary use to replace a FUSION while performing a periodic test at a laboratory.

Data Storage Management

A retention period can be configured to automatically delete data older than a predefined past date.

Data export in .CSV format


The proprietary file format (.cmg) is optimized in terms of size and types of data stored. This file format is not intended to be used outside our ecosystem (dBTrait, Cadence...). For simple use of the measured data, FUSION can create files in .csv format every logging period T (minimum 1 sec), giving the possibility to an external application to reuse the measured data. This .csv file is updated every T_j and pushed in «append» mode at the same time as the .cmg files.

Cadence and Fusion

FUSION is designed for monitoring. Each user can integrate FUSION in his/her own system but he/she may want to spend less time on practical issues related to deploying and setting-up a noise monitoring project (network deployment, computer management, on-site maintenance). In addition trying to lower the overall operating expenses also comes into the play!

For such reasons, Acoem offers web services suited to the requirements of each type of noise and vibration monitoring activity: Cadence service offer

Cadence services offers unrivalled service quality that guarantees reliable data to the customer without compromise on metrology. This is a sound basis for automatic calculations and/or expert analysis achieved by an acoustic consultant.

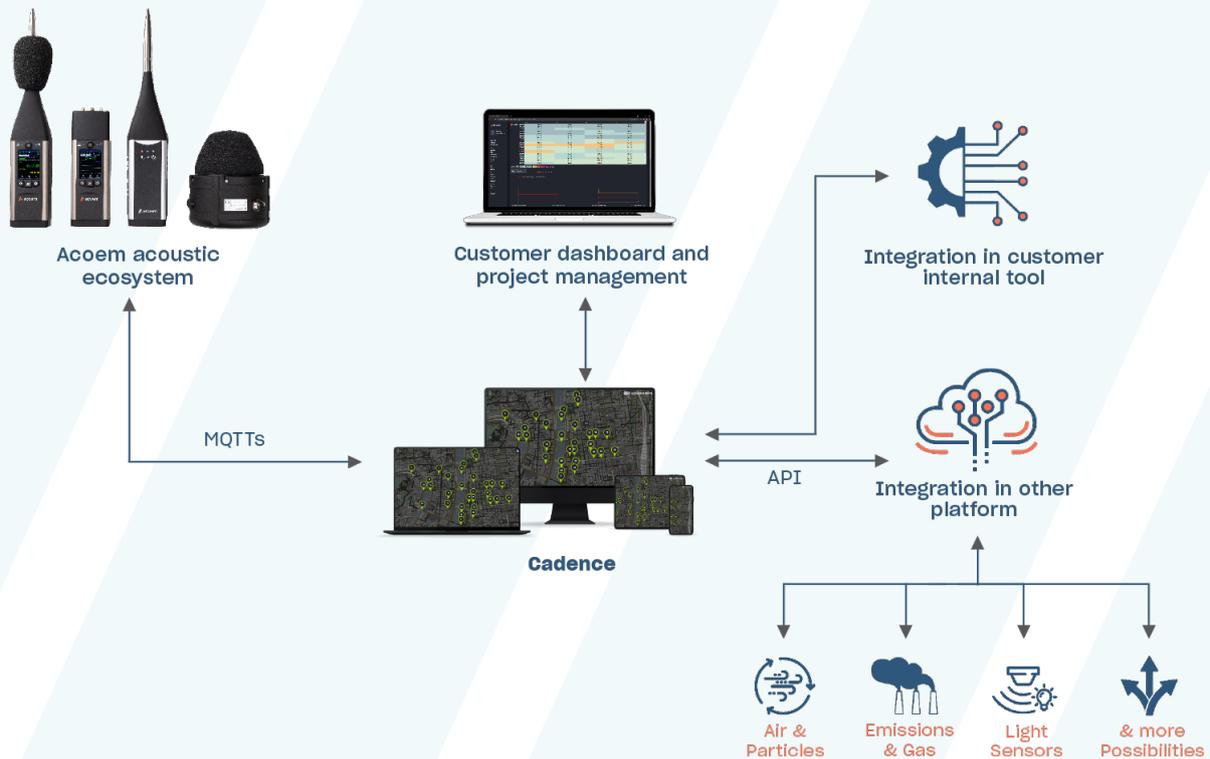

With Cadence, Acoem offers an environment of possibility accessible to the different persons involved in a monitoring project. From any terminal (computer, tablet, smartphone, etc.) connected to the Internet, you can view all the information available in real-time.

Cadence gives you complete monitoring autonomy Focus on your core business, while Cadence™ takes care of your data needs.

With Cadence™ you and your authorised team members have total control over every monitoring project, each device or an entire network of sensors at the touch of a button.

- Real-time overview of each measurement point
- Flexible & easy calibration, SOH, position, electrical checks

- Project management status overview
- Results in real time (heatmap, overall levels)
- Effortless data export & reporting
- Receive trigger & alarm notifications from any location

Unlimited devices, measurement points, authorised users & projects

- Connect each device automatically & create new projects in less than 60 seconds
- Compatibility with all Acoem noise monitoring devices
- Use aggregate & applicative data instead of raw data
- Store data securely on Acoem's servers
- Affordable with no infrastructure costs

Only pay for what you need, when you need it.

Main accessories (option)

Weatherproof kit ACC1098000



Now with FUSION 4G, we add a tropicalized treatment to main boards. FUSION with its weatherproof kit is designed to be directly installed on a tripod or another support without any risks of damage. For many years, Acoem devices are equipped by this weatherproof kit offering a complete resistance to any weather conditions.

WLS Wireless Vibration Sensor

FUSION interfaces in a very simple way to the WLS industrial wireless sensor. It allows recording vibrational signal on 3 axes (X, Y and Z) simultaneously with the recording of audio signals and all acoustic indicators (instant values, spectral values...).

The WLS sensor allows vibration recording on 1 axis (Z) or 3 axes simultaneously (X, Y and Z) with a frequency sampling of 12.8 kHz and a dynamic scale of 80g.

Battery operated (type Li-Ion) with an average lifetime of about 8 hours; it is rechargeable using a simple USB connection.

Several mounting accessories are available.

Outdoor microphone unit DMK01

FUSION external preamplifier input allows connecting an outdoor microphone unit of type DMK01 especially designed to separate the microphone from the instrument body.

This unit is composed of a stainless steel body, a dedicated preamplifier which allows using the microphone delivered with FUSION, a noise cone a specific windscreen and a dummy microphone designed to protect FUSION when its microphone is removed and used with the DMK01.

Specific electronic corrections are implemented in FUSION for the outdoor microphone unit DMK01 (embedded settings) in order to satisfy 0° and 90° reference directions.

Charge injection calibration check can also be operated from FUSION using DMK01 unit.



Webcam

For the identification of your events, an external webcam (type AXIS M3037-PVE) can now be interfaced to view and testify with certainty the source of the noise in question. Images and / or video files are synchronized and integrated into measurement campaigns for easy post-processing in dBTrait and viewing alarms in 01dBWebMonitoring.



Weather stations

A weather station can be interfaced to FUSION offering the possibility to simultaneously measure and store noise and weather data synchronously.

It is possible to select between 2 VAISALA weather stations: WXT532 type (2 parameters) or WXT536 type (6 parameters). These two weather stations are design without any moving transducers parts to avoid any breakdown in case of harsh weather conditions. It also limits the noise emission of this accessory.



The same power supply is used for FUSION and for the weather station; the 10 meters unique cable between the station and FUSION offers a good flexibility and ease of installation. The weather data logging period is defined as a multiple of the noise logging period.

	WXT532	WXT536
Wind speed	•	•
Wind direction	•	•
Air temperature		•
Relative humidity		•
Rain intensity		•
Barometric pressure		•

All weather case DSC01

For mid- and long-term environmental noise and vibration measurements FUSION can be inserted into a DSC01 weather protected case. This case will provide complete protection against bad weather conditions and also deals as a protection against theft or vandalism.



The DSC01 case also includes several glands, which allow you to use different cables (microphone extension cable, cable link with a weather station...) ensuring perfect sealing properties...


Tapping machine TM01

The TM01 tapping machine consists of an aluminium frame standing on 3 rubber feet, the height of which can be adjusted. It includes a camshaft that drives 5 hammers with a mass of 500g each, set 10 cm apart one from another. The TM01 machine allows for the hammers falling from a 40-mm effective height with a time interval of 100 ms between the drop of each hammer.

The TM01 machine includes a lead-acid gel battery that allows for an optimum and standardised continuous operation time of 2 hours.

A pushbutton is used to manage the operation of the machine. Depending on the length of time the button is pressed, the following actions can be achieved:

- Power-up of the machine: Short push (< 850 ms)
- Operating for 5 min: Short push
- Operating for 20 min: Long push (850-2,500 ms)
- Turn-off of the machine: Long push (> 2,500 ms)

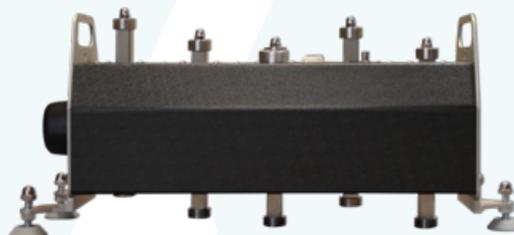

The TM01 machine is supplied with a radio frequency remote control that allows for remote start and stop. The remote control is effective through the walls and floors normally built in residential and office buildings (the emitter's range in direct field is greater than 100 m).

Omnidirectional noise sources LS01/LS02 & S103AC/ACDC

Acoem offers omnidirectional sources, LS02, S103AC, compliant with standards ISO 140 and ISO 3382



LS02



S103 AC

All sources have the same design. They consist of a 12-loudspeaker dodecahedron and contain each:

- a power amplifier
- a noise generator

Robust, compact, and easy to implement, all sources can be driven using a remote control. In addition to starting and stopping the sources, the user can control:

- the volume level by ± 2 dB steps or with a known gain (0 dB, -8 dB, -30 dB...).
- the type of noise: pink, white, swept sine according to different frequency ranges

Available options

FSN2002000 - Multispectra options

Activates multi-spectra measurement and storage:

- Type of spectrum: 1/1 or 1/3 octave
- Time weighting: Fast or Slow or none
- Simultaneous measurement and storage of two types of spectra (Leq and time weighting)

Stores spectral data at the logging period rate

If Trigger option (FSN2004000) activated:

- Possibility to store spectra at a faster logging period during events (down to 20 msec)

FSN2003000 - Audio recording option

Activates metrological audio recording:

- Selectable frequency sampling
- Manual trigger for recording start and stop directly from FUSION or remotely from the web interface
- User defined timer (periods and duration)

Activates MP3 audio recording:

- Selectable frequency sampling
- Selectable MP3 bit rate
- Manual trigger for recording start and stop directly from FUSION or remotely from the web interface
- User defined timer (periods and duration)

If Trigger option (FSN2004000) is activated

- Automatic audio recording during an event
- Synchronized audio recording simultaneously with manual markers

FSN2004000 - Trigger Option (Included in all fusion kits)

Activates single trigger:

- Days of the week condition for event detection activation
- One of the instantaneous values (broadband or frequency bands) measured can be selected (including weather data) for each period; event detection is defined by;
 - o User defined start trigger and end trigger levels
 - o User defined pre-trigger
 - o User defined post-trigger
 - o Minimum time duration
- Up to 24 user defined periods within a day

Additional actions triggered during an event:

- SMS generation
- TTL output (event or user defined duration)
- Audio recording (with Audio recording option FSN2003000) or vibration signal (with Option FSN2008000)
- Fast logging parallel measurement

FSN2005000 - Advanced indicators option (included in all fusion kits)

Measurement and storage of the following instantaneous indicators:

- Sliding LAeq (start time and end time, sliding duration)
- Sliding Ln (start time and end time, sliding duration)
- Exposure Level (start time and end time, predefined background noise level)

FSN2006000 - 4G modem activation option (included in all fusion kits)

Activates 4G modem for internet connection using 4G LTE Cat.4 :

- Full remote control and access with a smartphone, an internet tablet or a standard computer (Windows, Ios, MAC)
- FTP server for data transfer
- Automatic SMS notification on event detection (with Trigger option FSN2004000)
- Support of DTDNS dynamic IP address server
- SMS alarm on low battery (10%)
- SMS alarm on movement detected from initial location

FSN2007000 - Weather option

Measurement and storage of weather data acquired by VAISALA weather stations types WXT536 (6 transducers) or WXT532 (2 transducers):

- User defined selection of parameters
- Altitude correction for barometric pressure
- User defined Logging period (as a multiple of the noise logging period)
- Real time display of weather information with the web interface (wind rose for wind direction, time history for wind speed, instantaneous values for the other weather parameters)

FSN2008000 - Vibration signal recording option

Activates metrological signal recording from the WLS sensor:

- Definition of the number of axes to be recorded: 1 (Z) or 3 (X, Y and Z)
- Manual trigger for recording start and stop directly from FUSION or remotely from the web interface
- User defined timer (periods and duration)

If Trigger option (FSN2004000) is activated

- Automatic audio recording during an event
- Synchronized audio recording simultaneously with manual markers

FSN2009000 - Fusion option - building acoustics

For the FUSION Smart Noise & Vibration Analyzer, activation of parameters, acquisition and storage of building acoustics measurements (1/1 or 1/3 octave) including:

- spectrum of average levels in the source room during operation of the noise source
- spectrum of average levels in the receiving room during operation of the noise source
- spectrum of average levels in the receiving room during operation of the shock generator
- spectrum of average background noise in the receiving room
- reverberation time T20 & T30 with information regarding compliance of indicators with the ISO 3382-2 standard
- measurement of maximum equipment noise level
- ratings calculated immediately in the field in the sound level meter, without user intervention

Parallel recording of audio signal, time history and fast logging time history of all instantaneous and instantaneous spectral parameters for each measurement

FSN2010000 - Extended trigger option

Similar to Trigger option (FSN2004000) with the possibility to create up to 5 different events instead of a single one

Activates the possibility to combine (logical “and” / “or”) up to 5 different triggers to create an event

SMS can be sent to several telephone numbers

FSN2011000 - PNL-PNLT Option (included in all fusion kits)

Measurement and storage of PNL (Perceived Noise Level) or PNLT (Perceived Noise Level Tone corrected) for aircraft or helicopter

FSN2012000 - HTTP Commands option

Activates integrators HTTP commands mode

The «integrators commands» allow retrieval of information in real time. The operator has the possibility to query FUSION by a simple HTTP request, and FUSION responds with the corresponding real time values.

FSN2013000 - Push data option (included in all fusion kits)

Activates Automatic data transfer in push mode (from the instrument to one or two server)

The following parameters allows for selecting the types of data to upload:

- Instant values
- Sliding and exposure values
- Instant spectrum values
- Instant weather values
- Overall values
- Events
- Signal(s)

FSN2014000 - Webcam option

Interface to webcam

- Camera triggering by TTL output from FUSION
- Direct Ethernet connection of the camera with FUSION
- Image and / or video storage embedded in the measurement campaign
- Postprocessing in dBtrait with images and videos views of events

Packages

Overall specifications

All FUSION packages (exclude building) contain the minimum following specifications:

- Access point Wi-Fi connection
- Ethernet connection
- Wi-Fi data transfer
- Ethernet data transfer
- 4G Modem
- GPS location
- GPS or NTP time synchronization
- Periodic electrical check (multi CIC 5 frequencies, 2 levels)
- USB connection(mass storage)
- SD card reader
- 0°/90° reference direction
- Web interface for remote control
- Automatic data transfer in push mode
- dBFileManager software for manual data transfer
- SLM mode (Start/Stop)
- LOG mode (time history)
- Instantaneous values (up to 44 values in parallel)
- Global values
- Global statistical values (7 Ln values)
- PNL/PNLT indicators
- Sliding LAeq, sliding Ln and exposure level
- Back erase (mode SLM)
- Timer functions : immediate, delayed, daily periodic
- 1 user-definable event

Available packages

It is possible to order separately one or several options (for the delivery or as evolutions).

	FSN3032000 upgrade to Expert 4G	FSN3031000 upgrade to Analyser 4G	FSN310X000 Logger 4G
FSN2001000 Logger	1	1	1
FSN2002000 Multispectra	1	1	0
FSN2003000 Audio Recording	1	0	0
FSN2004000 Triggers	1	1	1
FSN2005000 Advanced Indicators	1	1	1
FSN2006000 4G Modem	1	1	1
FSN2007000 Weather	0	0	0
FSN2010000 Advanced Triggers	1	1	0
FSN2011000 Aircraft indicators	1	1	1
FSN2012000 http commands	0	0	0
FSN2013000 Push Data	1	1	1
FSN2014000 Webcam	0	0	0
FSN2009000 Building	0	0	0

1 Included - 0 Option

X = 2 Modem EU	X = 4 Modem US	X = 5 Modem APAC	X = 6 Modem LATAM	X = 7 Modem CN
4G Bands (MHz)	4G Bands (MHz)	4G Bands (MHz)	4G Bands (MHz)	4G Bands (MHz)
B1, B3, B7, B8, B20, B28A	B12, B14, B4, B2, B5, B13, B66, B71	B1, B3, B5, B8, B9, B18(B26), B19, B28	B1, B2, B3, B4, B5, B7, B28	B1, B3, B5, B8 TDD: B38, B39, B40, B41, TD-SCDMA: B34, B39

4G Modem versions

Technical specifications (serial number > 14000)

IEC Class

IEC 61672-1 ed. 2.0 (2013) (0° and 90° reference direction)
 IEC 61620 (1995) NF EN 61260/A1 (2002)
 Sound Level Meter, Integrating Sound Level Meter with storage, group X.

Type approval (extract)

LNE
 PTB (soon available)
 CEM
 METAS (soon available)

Dynamic range

21-139 dB (A, B), 26-139 dB (C), 31-137 dB (Z),
 1 single range for a rated sensitivity of 40 mV/Pa

Linear operating range for A weighting (5 frequencies)

31,5 Hz : 26-98 dB
 1 kHz : 23-138 dB
 4 kHz : 23-138 dB
 8 kHz : 23-134 dB
 12,5 kHz : 23-130 dB

Dynamic range Peak

60-140 dBC, 1 single range

Time weightings

Slow, Fast, Impulse, Peak

Frequency weightings

X=A, B, C, Z; Y=S, F, I for LXeq and LX
 X=A; Y=S, F, I for LXyTd
 X=C, Z for LXpk

Instantaneous broadband values stored

	LXY				LXYeq				LXYTd		LXYMinMax			
	A	B	C	Z	A	B	C	Z	A	A	B	C	Z	
F	X	X	X	X	X	X	X	X	X	X	X	X	X	
S	X	X	X	X	X	X	X	X	X	X	X	X	X	
I	X	X	X	X	X	X	X	X	X	X	X	X	X	
Pk			X	X										

LnsT (sliding Ln)
 LAeqsT (sliding LAeq)
 LAexPT (exposure level)

Instantaneous weather data stored

Wind speed [m/s]
 Wind direction [°]
 Rain intensity [mm/h]
 Barometric pressure [hPa]
 Air temperature [°C]
 Humidity [%HR]

Noise logging period T

Mini 20ms - maxi 3600s, 5 ms steps
 Short logging period: mini 20ms - max standard T, 5 ms steps.
 Short logging period applicable during events
 Short logging period must be a divisor of T

Weather logging period

Weather logging period is a multiple of T with a minimum of 1 second

Spectral analysis

Parallel measurement and storage of Leq and LY (Y=F, S, I)

Filters

1/1 (8Hz-16kHz) et 1/3 (6.3Hz-20kHz)

Statistics

7 selectable Ln in parallel from L1 to L99, 1 dB class
 Samples for calculation: T if Leq or 20 ms if LXy, 0.1 dB resolution

Back erase

0, 5s or 10s, SLM mode only

Input high pass filter

0,3 Hz / 10 Hz

Reference directions

0° on internal input
 0° and 90°, selectable built-in correction on external input (with a DMK01 external microphone)

Reference point for microphone

Centre of the protection grid (with or without nose cone).

Reference Level

94 dB.

Starting point for linearity tests

Reference level, i.e. 94 dB.

Data storage modes

SLM (hand-held sound level meter) and LOG (logging sound level meter)

Signals recording

Audio signal type

allows selecting either RAW (uncompressed data for dBTrait post-processing) or MP3 (format MPEG-1/2 Audio Layer 3 compressed data).

allows selecting audio signal sampling frequency;

Possible choices:

For RAW : 51.2kHz, 25.6kHz, 12.8kHz, 6.4kHz, 3.2kHz, 1.6kHz).

For MP3 : 48kHz, 32kHz, 16kHz, 8kHz.

MP3 bit rate [kbps]

allows selecting MP3 bit rate ; possible choices :

Fe [kHz]	48	32	16	8
Possible bit rate [kbps]	32	32	8	8
	96	96	32	32
	192	192	96	96

Vibration

Signal: Metrological, Fs = 12,800 Hz

Pre-trigger = 0 sec

1 (Z) or 3-axis(X, Y and Z)

Audio recording triggers

Simultaneously with events and manual (using FUSION integrated key and web interface for remote control)

Events (automatic coding)

5 user-definable event: codes 6 to 10

24 user-definable time periods

Triggers

Settings for pre-trigger, post-trigger, minimum time, end time

Types: on instant acoustic and weather values (except wind direction), instant spectral values, TTL input

Manual markers

On the instrument: 1 code "code 1"

On web interface: 5 codes: "codes 1 to 5"

Timers

Immediate, differed, daily periodic. Audio: periodic

Typical background noise

(with 40CE mounted on FUSION)

	[dB]	LA	LC	LZ
Acoustic	Typical	16,1	16,8	20,2
	maximum	20,0	21,0	24,0
Electric	typical	11,0	12,5	18,5
	maximum	16,0	17,0	21,0

Preamplifier

Integrated, not removable

External type PRE22 (included in DMK01) on external input (standard 10 m lemo extension cable)

Integrated keys

4 silent keys: on/stand-by/off and 3 multi-functions keys

Status indicators

LED red (overload)

LED blue (Wi-Fi connection)

LED green (power ON, blinking on on-going measurement, charge ON)

Display

High contrast colour screen 38*50mm resolution 320*240 pixels

3 sets of colours (day, contrast, night)

Display rate: 0.1s, Display resolution: 0.1dB

USB connection

Type 2.0; mass storage mode, charge on USB

Ethernet connection

Connector RJ45, Speed: 100 MB/s

DHCP mode

Wi-Fi Connection:

IEEE 801.11b, g

Point-to-point connection and infrastructure mode

Cellular network connection

Embedded modem 3.5G compatible with 4-band GSM/GPRS/EDGE and 3-band UMTS/HSDPA

Data connectivity

Integrated Network protected http server for web interface

Integrated FTP server for data access

SMS alarms

- On event: SMS text with FUSION serial #, location, date and time, user defined text, IP address:http port
- On low battery (10%): SMS text with FUSION serial #, location, date and time, % remaining battery
- On movement: SMS text with FUSION serial #, location, date and time, GPS coordinates, distance from previous location, IP address:http port (the alarm trigs if FUSION has moved more than the user defined distance)

Automatic SMS actions

- Sending "IP" by SMS to instrument makes it reply by sending an SMS with instrument serial #, location, date and time, IP:port address and automatically sends a new SMS at every new IP address in case of floating IP

Actions on SMS sent to the instrument

- On SMS sent "IP", the instrument replies by sending an SMS with the instrument serial #, location, date and time, IP:port address
- On SMS sent "stop", the instrument stops replying new SMS if IP has changed
- On SMS "reboot", the instrument reboots to establish a new connection and replies with an SMS with instrument serial #, location, date and time, IP :port address

Web interface refresh rate webpages

Standard: twice per second

Mobile: once per second

Analogue output

Audio output A, B, C or Z (+/-10Vpp R=2000hms)

Adjustable gain: 0, 10, 20, 30, 40, 50 dB

Electrical check

Programmable periodicity: 1, 2 or 4 times per day

(0h,0h-12h, 0h, 6h, 12h, 18h)

3 pre-set frequencies (1000 Hz, 2000 Hz, and 4000 Hz) and 2 user-defined frequencies (between 10 Hz and 20 kHz)

2 user-defined excitation levels, maximum level 5 V (100%)

External microphone input

For DMK01, PRE22 (R = 560k0ms / 22Vpp (+/- 11V)

TTL output

R = 100 Ohms / 0 / 5V

TTL input

R = 100 kOhms / 0...1V = «0» 1.8...5V =>1»

Battery

Type lithium polymer

Voltage 3.7V

Capacity 6750 mAh

Non removable, charging time approximately 3 hours

Typical power consumption

Without communication (screen switch off): < 1200 mW

+ Wi-Fi & screen switch on: < 1800 mW

+ Modem: <3800 mW

Operating lifetime

20 hours with Wi-Fi connection (during 10% of measurement time)

15 hours with active 3G connection (during 10% of measurement time)

(for temperatures ranging from 10°C to 50°C, in LOG mode with IT = 1 s, fine IT 100 ms, 1/3 octave and audio recording on threshold during 10% of the measurement time)

External power supply

DC 8 to 28 V on charge input

DC 5 V on USB input (slow charge)

Memory

SD, SDHC or SDXC card, 2 GB or higher (2GB standard delivery) for measured data and signals. Minimum recommended requirement: ≥ class 10. Please note only SD cards provided by 01dB should be used.

01dB cannot be held responsible for data loss if the SD card used is not delivered by 01dB.

Measured data stored on the SD card every 10 seconds.

Non-volatile memory for configurations, system log (500), calibration data (500) and electrical checks (500)

Clock

GPS PPS, error < 50 milliseconds

Internal clock, error < 0.5 s/24 hours

Localization

Automatic with integrated GPS

Information stored with measurement campaigns

Warm-up time

From power off: < 25 seconds

Operating temperature:

-10°C to +50°C

Humidity

IEC 60068-2-78: damp heat: 90% HR (non condensing at 40°C)

Localization

Automatic with integrated GPS
Information stored with measurement campaigns

Warm-up time

From power off: < 25 seconds

Operating temperature:

-10°C to +50°C

Humidity

IEC 60068-2-78: damp heat: 90% HR (non condensing at 40°C)

Electromagnetic compatibility

According to Directive 2004/108/EC
NF EN 61000-6-1 NF EN 61000-6-2 NF EN 61000-6-3 NF EN 61000-6-4 (2001)
ETSI EN 300 328 V1.5.1 (2004)

Protection

IP42 if the instrument is used in vertical position without connectors cover
IP55 if the instrument is used in vertical position with connectors cover

Influence of vibration

Use with no outdoor microphone:

- For mechanical vibration of an acceleration level of 1 m/s² perpendicular to the microphone diaphragm, at frequencies 31.5 Hz, 63 Hz, 125 Hz, 250 Hz, 500 Hz, 630 Hz, 800 Hz and 1000 Hz: the lower limit of the linear operating domain for A-weighting becomes 80 dB.
- For mechanical vibration of an acceleration level of 1 m/s² parallel to the microphone diaphragm, at frequencies microphone diaphragm, at frequencies 31.5 Hz, 63 Hz, 125 Hz, 250 Hz, 500 Hz, 630 Hz, 800 Hz and 1000 Hz: the lower limit of the linear operating domain for A-weighting becomes 60 dB.
- Use with outdoor microphone unit DMK01:
- For mechanical vibration of an acceleration level of 1 m/s² perpendicular to the microphone diaphragm, at frequencies microphone diaphragm, at frequencies 31.5 Hz, 63 Hz, 125 Hz, 250 Hz, 500 Hz, 630 Hz, 800 Hz and 1000 Hz: the lower limit of the linear operating domain for A-weighting becomes 75 dB.

Weight and dimensions

775 g

H x L x P: 300 x70 x 52 mm

Optional Accessories

- Weatherproof external charger IP67 (10m cable)
- Weather station VAISALA type WXT532 specific for the instrument (2 parameters: wind speed and direction)
- Weather station VAISALA type WXT536 (6 parameters: wind speed and direction, rain intensity, relative humidity, air temperature, barometric pressure)
- Connection cable between weather station and FUSION, for powering simultaneously FUSION and the weather station
- Outdoor microphone unit type DMK01 including preamplifier type PRE22, 10 m cable and nose cone. The use of RAL135 10 m cable does not need any particular correction.
- All weather case DSC01 with option 1 battery (10-days) or 2 batteries (20-days)
- Wireless vibration sensor 3-axis (X, Y, Z) 80g, Weight 373 g, Dimension Ø42 x H116 mm, 8h battery life.

Connecting these accessories has no influence on measurements

Building Acoustics Module (option)

Product Code

FSN2009000: Building option for FUSION

Frequency-based analysis

1/1 or 1/3 octave, 50 to 5000 Hz

Levels L1, L2, Li (Emission, Reception, Impact noise)

Calculation of the mean spectrum LZeq over the specific coding duration, detected automatically (source on duration)

Background noise level Lb

Calculation of the mean spectrum over the entire measurement duration

Integration times (IT)

1 second; 20 milliseconds

Maximum averaging time for spectra L1, L2, Lb and Li

120 seconds

Maximum measurement time for equipment noise

600 seconds

Simultaneous audio recording

Sampling frequency: 51.2 kHz, 25.6 kHz, 12.8 kHz, 6.4 kHz, 3.2 kHz, 1.6 kHz

Equipment noise levels

Selection of the maximum level for one of the following parameters: LXYMax where X = A, C or Z and Y = F, S or I

Calculation of reverberation times

Fine IT 20 ms for decay analysis

Simultaneous calculation of T20 and T30

Automatic detection of interrupted or pulsed noise sources

Schroeder integration for pulsed sources

Estimate by least squares approximation

Calculation of reverberation times

DI fine 20 ms pour évaluation des décroissances

Calcul simultané T20 et T30

Détection automatique source de bruit interrompue ou impulsionnelle

Intégration de Schroeder pour source impulsionnelle

Estimation par approximation des moindres carrés

Calculation of quality indicators (ISO 3382)

Name	Quality indicator	Description, default values
N	Background noise level too high*	Low dynamic range (between 41 and 45 dB for T30; between 31 and 35 dB for T20)
D	Calculation impossible*	Insufficient dynamic range (< 41 dB for T30; < 31 dB for T20)
<	Reverberation time too low*	Tr < 0.24 seconds (scaled by logging period = 20 ms)
	Non-linearity*	Non-linearity parameter >1%
C	Curvature*	C > 10% or C < 0; see [1] appendix B.3 Difference
L	Linearity of the sound source linearity	Difference between adjacent 1/1 or 1/3 octave bands > 6 dB

*: ISO 3382-2 standard indicator

Invalid indicators displayed on the Tr spectrum and stated on decay

Audio comments

Used to store a voice comment, with the same sampling frequency as for the measurement

PC Software

dBInside

Deliverable and accessories

The standard package (FSN1001000) of FUSION includes the following items:



FUSION with 40CE microphone



Handle



Profile for tripod mounting



Windscreen



Windscreen claw




SD card 2Go



AC Power supply



USB cable

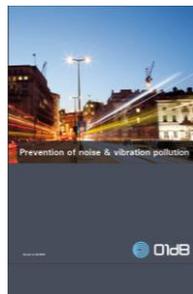

Metrological documentator



NOT1692 FEBRUARY 2022 B - FLUJON 4G TECHNICAL DATASHEET EN



acoem
CREATING ENVIRONMENTS OF POSSIBILITY

Acoem has a continuous policy of product development and although the company reserves the right to changes specifications, it attempts to keep customers informed of any alterations. ©2021 Acoem. All rights reserved.

acoem.com